




LNS Sàrl
Route de Frinvillier
2534 Orvin/Switzerland

U-SERIES

UBV

Power Voltage	200V or 400V
Frequency	50Hz
Orientation	Right
Filter Type	Cartridge
Filter Rating	10 micron (oil)
Control Voltage	24VDC
Pressure (max)	140 Bar
Flow Volume	4-22 l/min
Standard Tank Capacity	
Capacity	80 Liters
Motor Power	7,5 HP
Pump Type	Piston

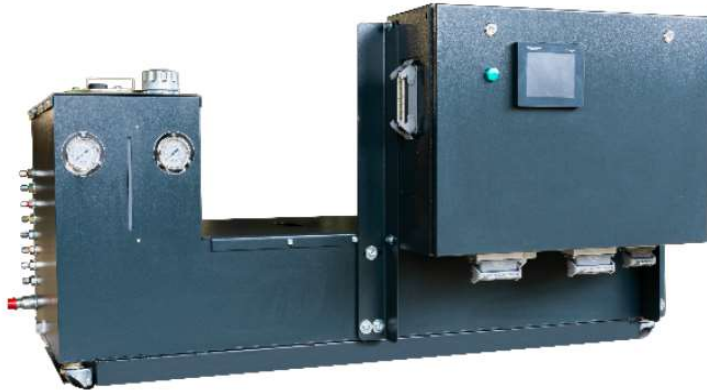

- Designed to fit under most LNS bar feeder units
- Piston high-pressure pump with patented technology, variable flow, and integrated transfer pump
- Machine tool interface allowing independent control of up to 8 coolant outlets and 4 user-defined pressure settings via M-code
- Touch-screen HMI to change unit settings and monitor various operations
- Includes high pressure hoses and fittings, suction hose, standpipes for machine tool tank connections, power / control interface cables and machine tool side bases
- Unit power supplied by machine tool or a separate power drop from the factory

